1 9 DEC 1947

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WARTIME REPORT

ORIGINALLY ISSUED

October 1945 as
Advance Restricted Report L5G23

THE RESISTANCE OF THREE SERIES OF FLYING-BOAT

HULLS AS AFFECTED BY LENGTH-BEAM RATIO

By Norman S. Land, Jerold M. Bidwell,
and David M. Goldenbaum

Langley Memorial Aeronautical Laboratory
Langley Field, Va.

NACA

WASHINGTON

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

ADVANCE RESTRICTED REPORT

THE RESISTANCE OF THREE SERIES OF FLYING-BOAT

HULLS AS AFFECTED BY LENGTH-BEAM RATIO

By Norman S. Land, Jerold M. Bidwell,
and David M. Goldenbaum

SUMMARY

Data obtained from several independent length-beam-
ratio investigations were correlated in order to determine
the general effect of length-beam ratio on the resistance
characteristics of three series of flying-boat hulls. The
study involved length-beam ratios ranging from 5.07 to
10.5 for a large range of loading conditions. Analyses
were made at the best-trim hump, the free-to-trim hump,
and a high-speed condition near get-away.

Comparisons were made by use of coefficients based
on beam, length-beam product, and $length^2$-beam product.
An optimum length-beam ratio was found beyond which no
further reduction in hydrodynamic resistance occurred.
This optimum varied with the hull lines of the series.

INTRODUCTION

The trend in the design of flying boats has been
toward higher length-beam ratios. It is inferred from
experience with flying boats that an improvement in
hydrodynamic characteristics is obtained with increasing
length-beam ratio; otherwise, the heavier loadings now
used at the higher length-beam ratios would not have been
acceptable. Investigations of the degree and extent of
improvement of the hydrodynamic characteristics with higher
length-beam ratios than conventional length-beam ratios
would therefore be advantageous.

Data for the investigations were obtained from model
tests conducted at the Deutsche Versuchsanstalt für Luft-
fahrt (DVL), the Langley Laboratory of the NACA, and
Stevens Institute of Technology (references 1 to 4). The
data were analyzed and compared to determine trends for
each series. The over-all effect of length-beam ratio on
the resistance characteristics of flying-boat hulls was
then determined from the trends.

MODELS

The Series

Inasmuch as the three series involve a total of
11 models representing variations of three basic designs,
data pertinent to a comparison of the series are presented
in table I.

DVL series.- The basic model of the DVL series was
evolved by Sottorf (reference 1). The models of this
series (table I) were developed from the basic form by
starting at the step and increasing the spacing of the
stations of the forebody and afterbody along the tangent
to the keels at the step in proportion to the length
(fig. 1). In this manner the values of beam, angle of
dead rise, angles of forebody and afterbody keels, and
depth of step remain constant. The three DVL models had
length-beam ratios of 6.04, 7.50, and 9.19; Langley tank
model 184 (reference 2), which is a continuation of the
DVL series, had a length-beam ratio of 10.5.

NACA series.- The basic form of the NACA series was
similar to NACA model 84-AF (reference 5) except for a
greater depth of step to conform with current practice in
obtaining good landing stability. The series was evolved
by maintaining constant products of length and beam and
by making corresponding transverse sections of the bottom
surfaces geometrically similar (fig.2). Constant values
were also maintained for angle of dead rise, angles of
forebody and afterbody keels, height of hull, and depth
of step in inches. The three NACA models had length-beam
ratios of 5.23, 6.53, and 7.84 (table I).

Stevens Institute series.- The hull of the XPB2M-1
flying boat was used as the basis of the Stevens Institute

series. The models were developed in the same manner as the DVL models; that is, by expanding the station spacing along a tangent to the forebody and afterbody keels at the step (fig. 3). Four models having length-beam ratios of 5.07, 6.19, 7.32, and 8.45 were used in the investigation (table I).

Variations in Hull Form

A comparison of the plan forms of the bottom surfaces of the three series for a selected length-beam ratio and beam is made in figure 4. This figure facilitates a comparison of the differences in forebody-afterbody length ratios and in the hull lines themselves.

As seen in figure 4, the NACA series has the largest ratio of forebody length to afterbody length; whereas little difference exists in the forebody-afterbody length ratios of the other two series. The lines of the afterbodies of the DVL series and the Stevens Institute series are fuller than the lines of the afterbody of the NACA series, especially near the sternpost.

A tail extension may contribute to decreasing the trimming moment at low speeds. The DVL models had no tail extension inasmuch as they were designed as seaplane floats rather than as flying-boat hulls. The NACA series and the Stevens Institute series, both models of flying-boat hulls, had tail extensions.

The DVL float had no chine flare on the afterbody whereas the NACA series had chine flare over the entire length of the afterbody. The Stevens Institute series had chine flare near the sternpost accompanied by a small "breaker" step just forward of the sternpost. All three series had approximately the same amount of chine flare on the forebody.

The included angle between the forebody and afterbody keels was 7.0° for the DVL and the Stevens Institute series and was 6.8° for the NACA series. This difference in included angle is considered negligible.

The depth of step (percent beam) was the same for the DVL and the Stevens Institute series but was greater for the NACA series.

Each of the three series of models was tested about a center of moments that was thought to be reasonable. These centers of moments are not in the same location with respect to the step but they are close enough to preclude any differences in the trends of the series.

RESULTS

Standard coefficients.- The results of the tests were reduced to the usual coefficients based on Froude's law to make them independent of size. In these coefficients, the beam was chosen as the characteristic dimension. The non-dimensional coefficients are defined as follows:

C_Δ load coefficient (Δ/wb^3)

C_V speed coefficient ($V/\sqrt{gb}$)

C_M trimming-moment coefficient (M/wb^4)

Δ/R load-resistance ratio

where

Δ load on water, pounds

w   specific weight of water, pounds per cubic foot (63.4 for these tests; usually taken as 64 for sea water)

b   beam, feet

R   resistance, pounds

V   speed, feet per second

g   acceleration of gravity (32.2 ft/sec^2)

M   trimming moment, pound-feet

Any consistent system of units may be used. The moment data are referred to the centers of moments shown in figures 1 to 3. Tail-heavy moments are considered positive. Trim is the angle between the base line of the model and the horizontal.

Special coefficients.- The beam of the hull is usually
considered as the characteristic dimension in the coef-
ficients based on Froude's law. In reference 3, however,
Bell discusses length-beam product as being fundamental
in eliminating size; in reference 6, Parkinson considers
length^2-beam as being a fundamental quantity controlling
forebody spray.

In an effort to determine the comparative effects
based on the foregoing considerations, nondimensional
coefficients having characteristic dimensions of the square
root of length-beam product and cube root of length^2-beam
product have been used in this report in addition to the
standard coefficients used. These "special" coefficients
are not proposed as substitutes for the standard ones but
are used merely to facilitate this analysis.

These special coefficients are defined as follows:

Load coefficients:

$$C_{\Delta_1} = \frac{\Delta}{w(Lb)^{3/2}}$$

$$C_{\Delta_2} = \frac{\Delta}{wL^2b}$$

Speed coefficients:

$$C_{V_1} = \frac{V}{\sqrt{g}\ \sqrt[4]{Lb}}$$

$$C_{V_2} = \frac{V}{\sqrt{g}\ \sqrt[6]{L^2b}}$$

Trimming-moment coefficients:

$$C_{M_1} = \frac{M}{w(Lb)^2}$$

$$C_{M_2} = \frac{M}{w(L^2b)^{4/3}}$$

where L is length from stem to sternpost measured in
feet.

In comparing hulls of different length-beam ratios
by means of the standard coefficients, the beam is con-
stant and hence the hull of the model with the highest
length-beam ratio is obviously much larger than the hull
of the model with the lowest length-beam ratio. If coef-
ficients based on length-beam product are used, comparable
hull sizes (reference 3) are maintained as the length-beam
ratio is changed. If coefficients based on length²-beam
product are used, models with high length-beam ratios have
smaller length-beam products than models with lower length-
beam ratios but the spray characteristics are more nearly
comparable (reference 6).

The special coefficients therefore are employed to
make the resistance characteristics of models having
various length-beam ratios comparable when the size and
spray are comparable.

Figure 5 illustrates the relation between the standard
and special coefficients.

Table of results.- Comparisons of the series were
made at the best-trim hump, the free-to-trim hump, and a
high-speed condition; the results are summarized in table II.
No results are given in this table at best-trim hump or
the high-speed condition for the Stevens Institute series
because data were unavailable.

No data are presented for speed coefficient C_V at
the free-to-trim hump because of very indefinite resistance
humps in references 1 to 4.

DISCUSSION

Best-trim hump.- Best-trim hump is only of academic
interest because, with the length-beam ratios used at pres-
ent, it is seldom attained. The control moments involved
are often unavailable and the best trim is usually below
the lower trim limit of stability. A comparison of the
three series at the best-trim hump is given, however, because
with high length-beam ratios the stability characteristics
may be such that best-trim hump may be attained in practice.
If the best-trim hump is attainable, analyses of the

DVL series (figs. 6(b), 7(b), and 8(b)) indicate definite
advantages in going to higher length-beam ratios than are
used in present design practice. For the DVL series, at
all coefficient bases considered, the load-resistance
ratio Δ/R increases with increasing length-beam ratio
and attains an optimum at a length-beam ratio of approxi-
mately 9.

An analysis of the NACA series (figs. 6(a), 7(a), and
8(a)) does not indicate so clear a conclusion as the analy-
sis of the DVL series. On the basis of constant beam
loading, load-resistance ratio increased with increasing
length-beam ratio as far as the tests extended. With con-
stant length-beam product, an optimum length-beam ratio
of about 6.5 is shown. When the NACA series of hulls is
loaded in proportion to length^2-beam product, the resist-
ance increases slightly as the length-beam ratio is
increased.

The speed at which the hump occurs increases with
increasing length-beam ratio. If small changes in thrust
with speed are assumed, a higher hump speed may be favor-
able in that at higher speeds more load is supported by
the wing; hence, less load is on the water.

Although, in general, the load-resistance ratio
increases with increasing length-beam ratio, the best trim
decreases with an accompanying rise in trimming moment.

For either the DVL or the NACA series, loading pro-
portional to length^2-beam product decreases the effect of
length-beam ratio on resistance and trim. This trend
leads to the conclusion that, as length-beam ratio is
increased for a given gross load, a smaller hull (smaller
length-beam product) could be used with no increase in
hydrodynamic resistance.

Free-to-trim hump.- At the free-to-trim hump, for the
three coefficient bases considered, Δ/R increases with
length-beam ratio to an optimum length-beam ratio of about
9 for the DVL series (figs. 9 to 11). The NACA series
has an optimum length-beam ratio of about 7 if compared on
a basis of constant beam and an optimum of about 6 if com-
pared on a basis of constant length-beam product. Compari-
son of the NACA series on the basis of constant length^2-
beam product results in a reversal of trend; that is, Δ/R
decreases with increasing length-beam ratio. No optimum
was attained for the Stevens Institute series on any basis

but the indication is that one might have been found if
the series had been extended to higher length-beam ratios.

   Except for the comparison made at constant length^2-
beam product, the trim at the hump for the three series
of models decreases with increasing length-beam ratio.
The comparison at constant length^2-beam product indicates
a slight increase in trim with length-beam ratio for the
NACA and DVL series and a slightly varying trim with
length-beam ratio for the Stevens Institute series. Per-
haps the least slope occurs somewhere between the constant
length-beam product and the constant length^2-beam product.

   Loadings proportional to length^2-beam decrease the
effect of length-beam ratio on the free-to-trim-hump
resistance and trim.

   High-speed characteristics.- From take-off consider-
ation, it was desirable to ascertain the effects of length-
beam ratio at a high-planing-speed condition. The condi-
tion chosen was one in which the angle between the fore-
body keel and the water was 7° and the speed coefficient
C_V based on beam was 6.0 at a length-beam ratio of 6.04.
Inasmuch as a difference in size is implied when changing
from one basis of comparison to another, a difference must
also occur in the speed. The relation between speed coef-
ficients based on beam, length-beam product, and length^2-
beam product for this condition is shown in figure 5.

   Up to a length-beam ratio of 7.5 (see figs. 12 and 13)
the Δ/R trends of the DVL and the NACA series are similar.
Small differences may be attributed to the fairing of the
curves inasmuch as the number of test points were few.
An optimum Δ/R value for the DVL series occurs at about 9
regardless of the basis used for comparison.

   At high planing speeds, length-beam ratio has the
least effect on load-resistance ratio when the hulls are
loaded in proportion to the length-beam product.

                        CONCLUSIONS

   A comparison of data obtained from three series of
flying-boat hulls investigated at the Deutsche Versuchs-
anstalt für Luftfahrt (DVL), the Langley Laboratory of the
NACA, and Stevens Institute of Technology and incorporating

length-beam ratios ranging from 5.07 to 10.5 indicate the following conclusions:

1.   An optimum length-beam ratio was found beyond which no further reduction in resistance occurred. The optimum ratio depended upon the hull lines of any given model series.

2.   The least change in the resistance characteristics with length-beam ratio occurred when:

(a) Best-trim hump was considered on the basis of constant $length^2$-beam product.

(b) Free-to-trim hump was considered either on the basis of constant length-beam product or constant $length^2$-beam product.

(c) A high-speed condition was considered on the basis of constant length-beam product.

3.   The small change in hydrodynamic characteristics with length-beam ratio, when compared on the basis of constant $length^2$-beam product, seemed to indicate that at high length-beam ratios smaller hulls could be used without sacrificing resistance characteristics.

Langley Memorial Aeronautical Laboratory
     National Advisory Committee for Aeronautics
          Langley Field, Va.

REFERENCES

1. Sottorf, W.: The Design of Floats. NACA TM No. 860,
      1938.

2. Bidwell, Jerold M., and Goldenbaum, David M.: Resist-
      ance Tests of Models of Three Flying-Boat Hulls with
      a Length-Beam Ratio of 10.5. NACA ARR No. L5G19,
      1945.

3. Bell, Joe W., Garrison, Charlie C., and Zeck, Howard:
      Effect of Length-Beam Ratio on Resistance and Spray
      of Three Models of Flying-Boat Hulls. NACA ARR
      No. 3J23, 1943.

4. Davidson, Kenneth S. M., and Locke, F. W. S., Jr.:
      General Tank Tests on the Hydrodynamic Character-
      istics of Four Flying-Boat Hull Model's of Differing
      Length-Beam Ratio. NACA ARR No. 4F15, 1944.

5. Parkinson, John B., Olson, Roland E., Draley, Eugene C.,
      and Luoma, Arvo A.: Aerodynamic and Hydrodynamic
      Tests of a Family of Models of Flying-Boat Hulls
      Derived from a Streamline Body - NACA Model 84 Series.
      NACA Rep. No. 766, 1943.

6. Parkinson, John B.: Design Criterions for the Dimen-
      sions of the Forebody of a Long-Range Flying Boat.
      NACA ARR No. 3K08, 1943.

TABLE I

DIMENSIONS OF MODELS

Geometric dimensions	DVL series (references 1 and 2)				NACA series (reference 3)			Stevens Institute series (reference 4)			
	1a	8	7	Langley tank model 184	144	145	146	339-22	339-1	339-23	339-46
Over-all length, in.	71.33	88.58	108.53	124.12	114.85	128.41	140.67	-----	-----	-----	-----
Length to sternpost, in.	71.33	88.58	108.53	124.12	83.33	93.17	102.06	27.37	33.45	39.53	45.61
Length of forebody, in.	39.36	48.87	59.92	68.48	50.10	56.02	61.36	15.22	18.60	21.98	25.36
Length of afterbody, in.	31.97	39.71	48.61	55.64	33.23	37.15	40.70	12.15	14.85	17.55	20.25
Maximum beam, in.	11.81	11.81	11.81	11.81	15.92	14.24	13.00	5.40	5.40	5.40	5.40
Length-beam ratio	6.04	7.50	9.19	10.5	5.23	6.53	7.84	5.07	6.19	7.32	8.45
Forebody-afterbody length ratio	1.231	1.231	1.231	1.231	1.507	1.507	1.507	1.253	1.253	1.253	1.253
Angle of dead rise excluding chine flare, deg	20	20	20	20	20	20	20	20	20	20	20
Angle of afterbody keel, deg	5.0	5.0	5.0	5.0	5.5	5.5	5.5	7.0	7.0	7.0	7.0
Angle of forebody keel, deg	2.0	2.0	2.0	2.0	1.3	1.3	1.3	0	0	0	0
Depth of step, percent beam	5.0	5.0	5.0	5.0	6.28	7.02	7.70	5.0	5.0	5.0	5.0
c.g., forward of step, in.	5.4	5.4	5.4	5.4	7.2	7.2	7.2	1.89	1.89	1.89	1.89
c.g., height above keel at step, in.	16.56	16.56	16.56	16.56	17.94	17.94	17.94	4.86	4.86	4.86	4.86
Chine flare, forebody	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Chine flare, afterbody	No	No	No	No	Yes	Yes	Yes	←——Near sternpost only——→			

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

TABLE II

SUMMARY OF COMPARISONS OF THE SERIES

Series	Bases (constant)	Best-trim hump					Free-to-trim hump			High speed	
		Fig.	Trim (deg)	Speed coefficient	Δ/R	Trimming-moment coefficient	Fig.	Trim (deg)	Δ/R	Fig.	Δ/R
DVL	Beam	6(b)	Decreases with increase in L/b.	Increases with increasing L/b. No maximum value attained.	Increases with increasing L/b to optimum value of about 9.5.	Increases with increasing L/b.(Moment accelerates with increasing L/b.)	9(a)	Decreases with increase in L/b	Increases with increasing L/b to optimum value of about 9.5.	12(a)	Increases with increasing L/b at heavy loads to optimum of about 9.25. Little change with L/b at light loads.
	Length-beam product	7(b)	Decreases with increase in L/b. Slopes of curves less than those at constant beam.	Increases with increasing L/b to extrapolated maximum value at L/b of about 9.5. Slopes of curves less than those at constant beam.	Increases with increasing L/b to optimum value of about 9.0. Slopes of curves less than those at constant beam.	Increases with increasing L/b.(Moment proportional to L/b.)	10(a)	Very slight decrease with increasing L/b. Minimum attained at L/b of about 9.5.	Slight increase with increasing L/b. Optimum value at L/b about 9.0.	12(b)	Increases with increasing L/b at all loads to optimum of about 9.25.
	Length²-beam product	8(b)	Decreases with increase in L/b to a minimum L/b of 8.5. Least change of trim with L/b.	Increases with increasing L/b to extrapolated maximum value at L/b of about 10.5. Slopes of curves less than those at constant length-beam product.	Very slight increase with increasing L/b to optimum value at a L/b of about 8.5, after which it drops off rapidly.	Increases with increasing L/b.(Moment decelerates with increasing L/b.)	11(a)	Slight increase with increasing L/b.	Negligible change with increasing L/b. Falls off after L/b of about 9.5.	12(c)	Increases with increasing L/b at all loads to optimum of about 9.25.
NACA	Beam	6(a)	Decreases with increase in L/b.	Increases with increasing L/b. No maximum value attained.	Steady increase with L/b. Appears to approach an optimum but no optimum value attained.	Increase with increasing L/b.(Small acceleration in moment with increasing L/b.)	9(b)	Decreases with increase in L/b.	Increases with increasing L/b to optimum value at L/b of about 7.5.	13(a)	Small decrease with increasing L/b for all loads.
	Length-beam product	7(a)	Decreases with increase in L/b. Slopes of curves less than those at constant beam.	Increases with increasing L/b. Slopes of curves less than those at constant beam.	Increases with L/b to optimum value at L/b of approximately 6.5.	Increases with increasing L/b.(Slight deceleration in moment with increasing L/b.)	10(b)	No change to a L/b of 6.5; slight decrease with increasing L/b thereafter.	No change with L/b to a value of 7.0, after which it decreases.	13(b)	Small increase with increasing L/b at the heavier load. No change at the lighter load.
	Length²-beam product	8(a)	Decreases with increase in L/b ratio. Least change of trim with L/b.	Increases with increasing L/b. Slopes of curves less than those at constant length-beam product.	Slight decrease with increasing L/b.	Increases with increasing L/b. (Moment decelerates with increasing L/b.)	11(b)	Slight increase with increasing L/b to maximum at L/b of 7.0.	Decreases with increasing L/b.	13(c)	Small increase with increasing L/b at all loads.
Stevens Institute	Beam		No data.	No data.	No data.	No data.	9(c)	Sharp decrease with increasing L/b.	Increases with increasing L/b. No optimum value attained.		No data.
	Length-beam product		No data.	No data.	No data.	No data.	10(c)	Slight increase with L/b to L/b of 6.0; marked decrease thereafter.	Small increase with increasing L/b. No optimum value attained.		No data.
	Length²-beam product		No data.	No data.	No data.	No data.	11(c)	Increases with increasing L/b to L/b of 6.0; decreases thereafter.	Very slight increase with increasing L/b. No optimum value attained.		No data.

Center of moments

Langley 184 | DVL 7 | DVL 8 | DVL 1a

5.4"

16.56"

2°

5°
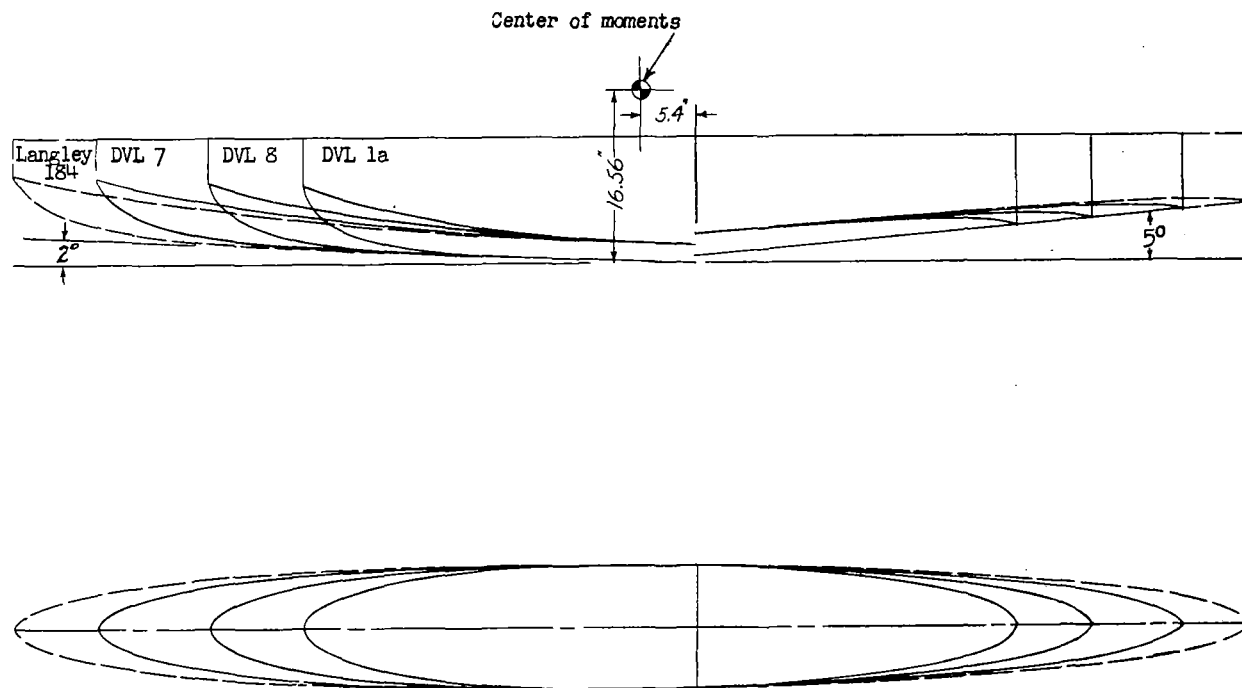
NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 1.- Profile and plan views of the DVL series including Langley tank model 184.

Fig. 1

Fig. 2

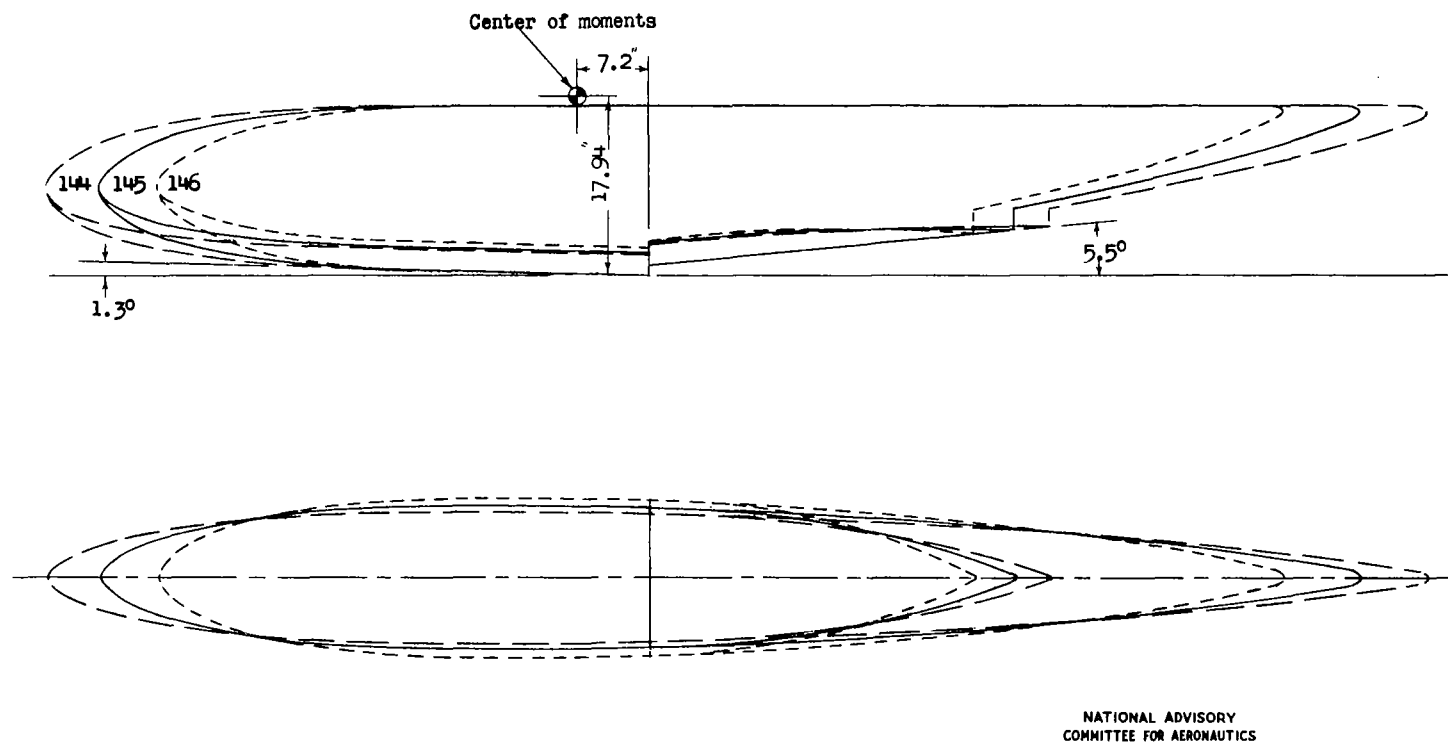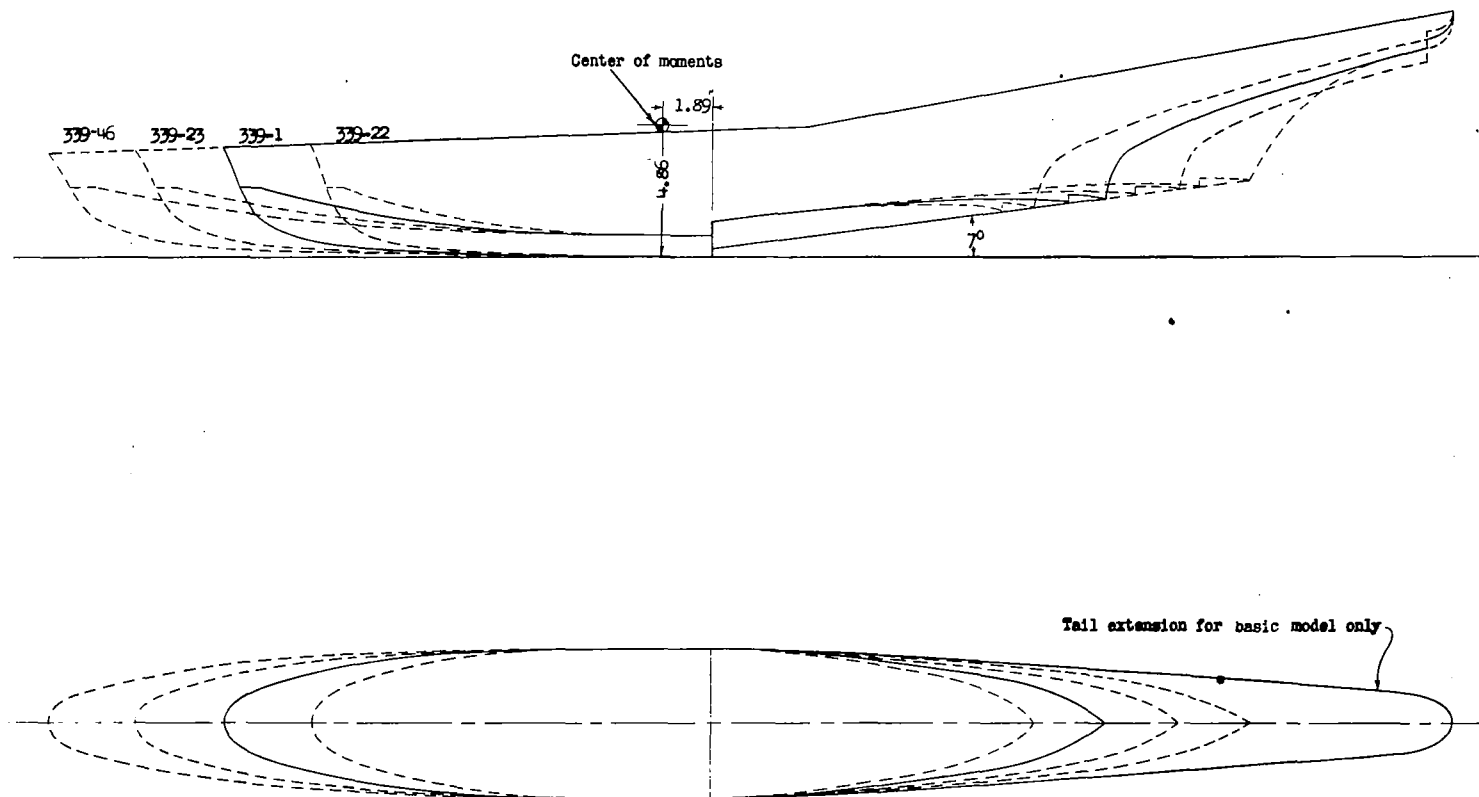Center of moments

7.2"

17.94"

144 145 146

5.5°

1.3°

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 2.- Profile and plan views of the NACA series.

Center of moments

339-46 339-23 339-1 339-22

1.89

4.86

7°

Tail extension for basic model only

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 3.- Profile and plan views of the Stevens Institute series.

Fig. 3

Fig. 4

NACA series ————————
Stevens Institute series ——— ———
DVL series —— —— ——

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS
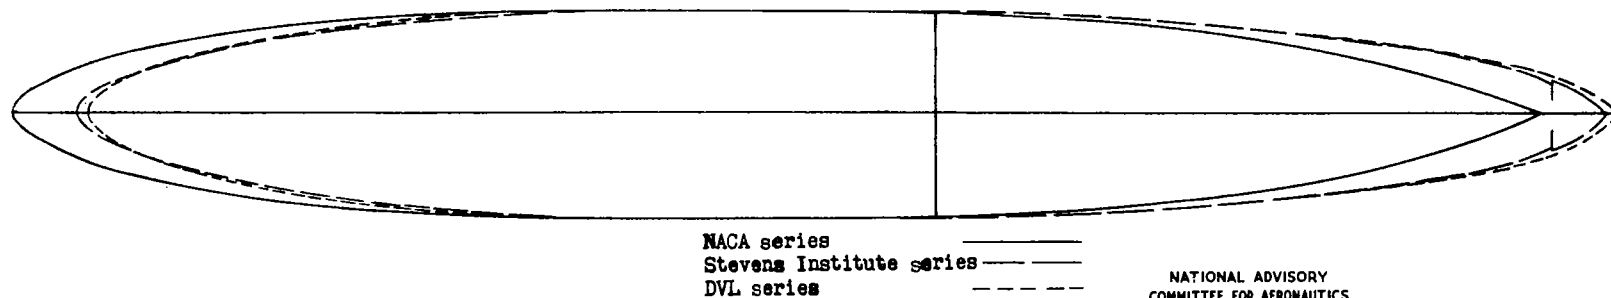
Figure 4.- Plan views of the three series of
models at an arbitrary length-beam
ratio of 7.5 and a constant maximum
beam. (Tail extensions omitted)
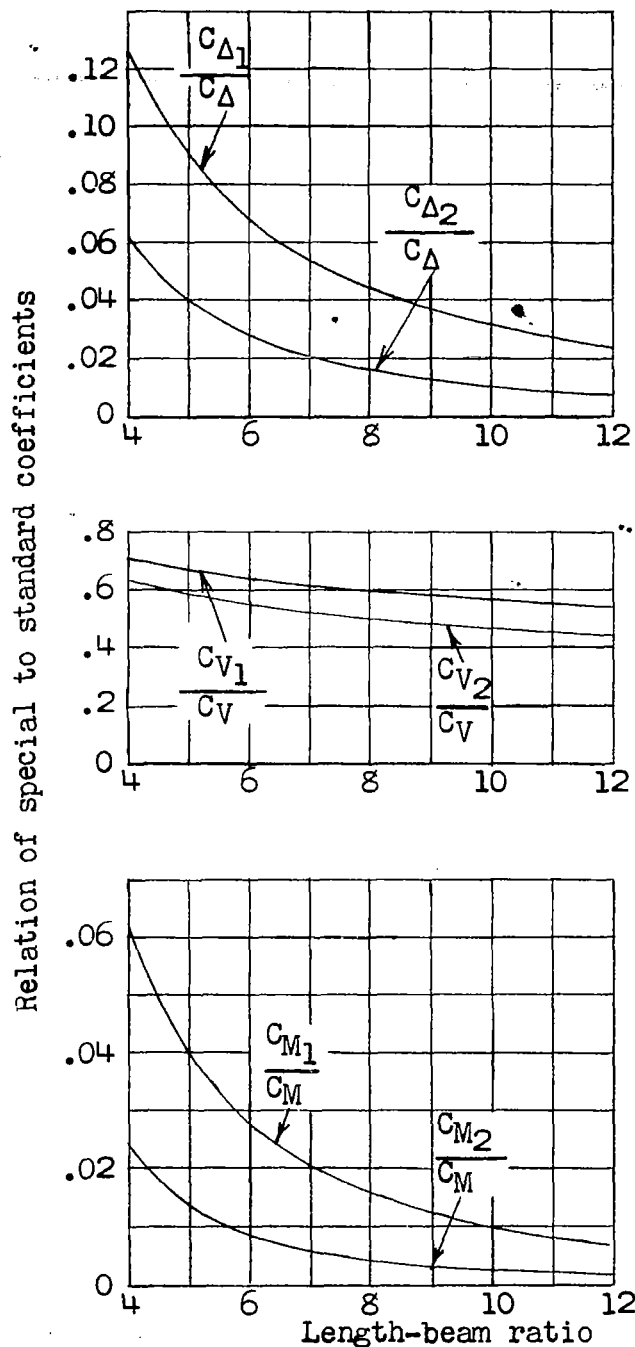
Figure 5.- Variation of relation between special and standard coefficients with length-beam ratio.
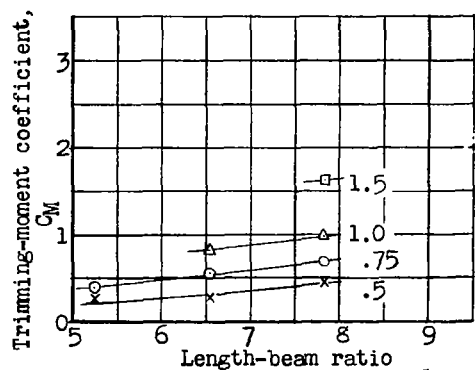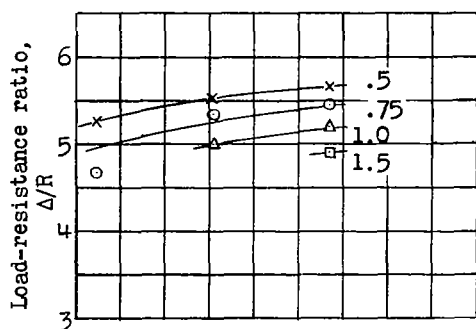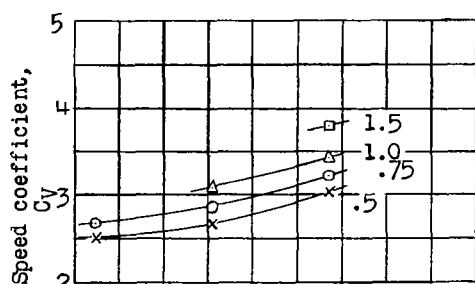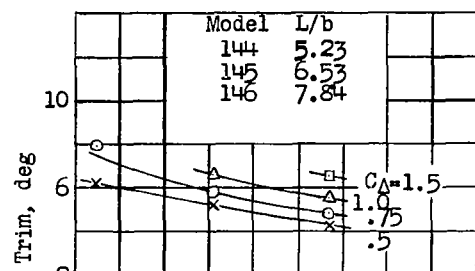
(a) NACA models 144, 145, 146.
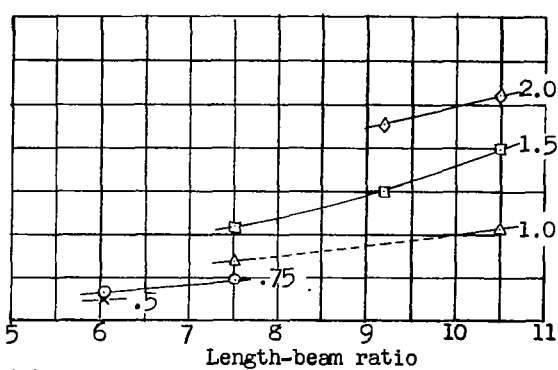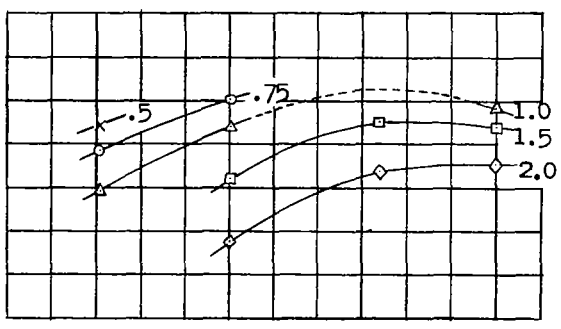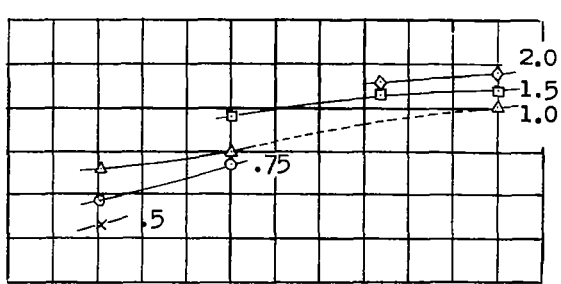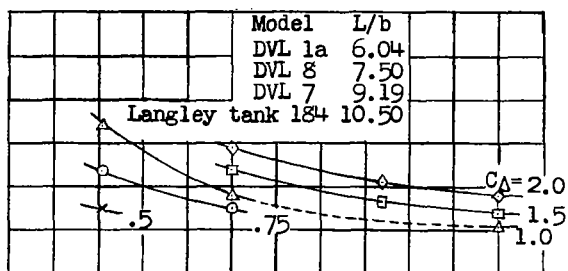
(b) DVL series.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS.

Figure 6.- Best-trim hump characteristics for two series of models about
their respective center-of-gravity positions. Constant beam.
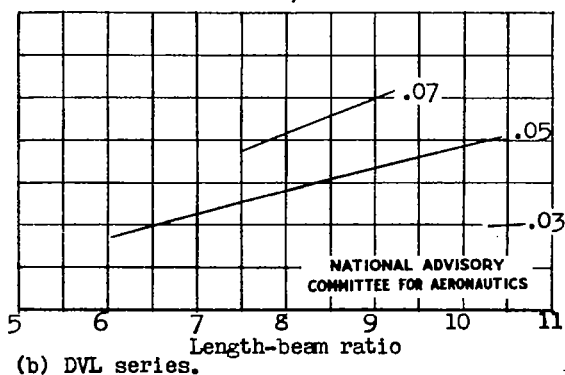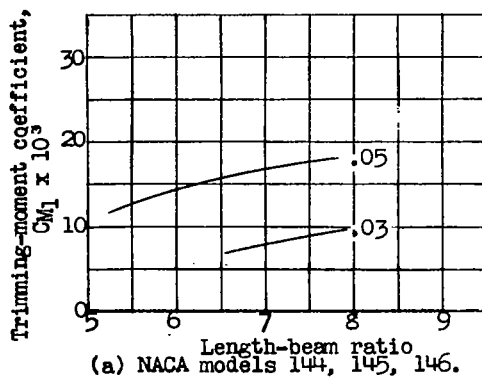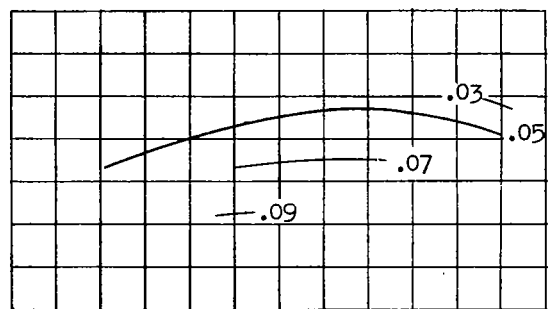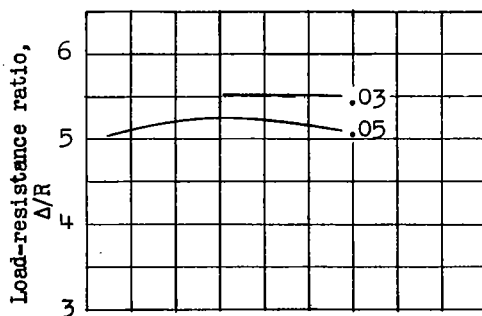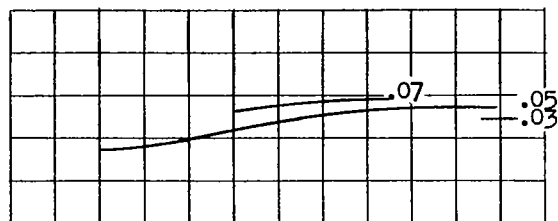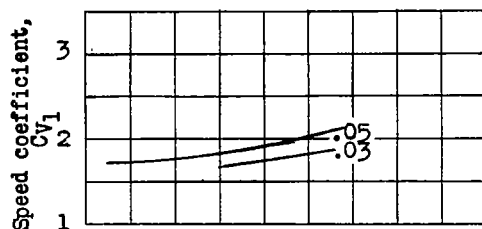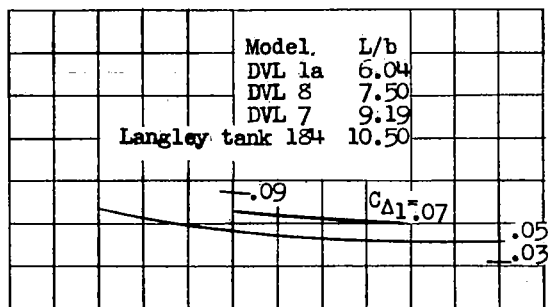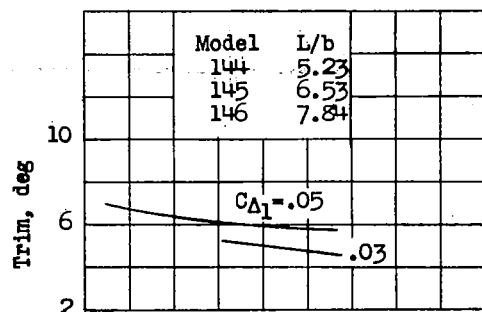
Figure 7.- Best-trim hump characteristics for two series of models about
their respective center-of-gravity positions. Constant length-beam product.
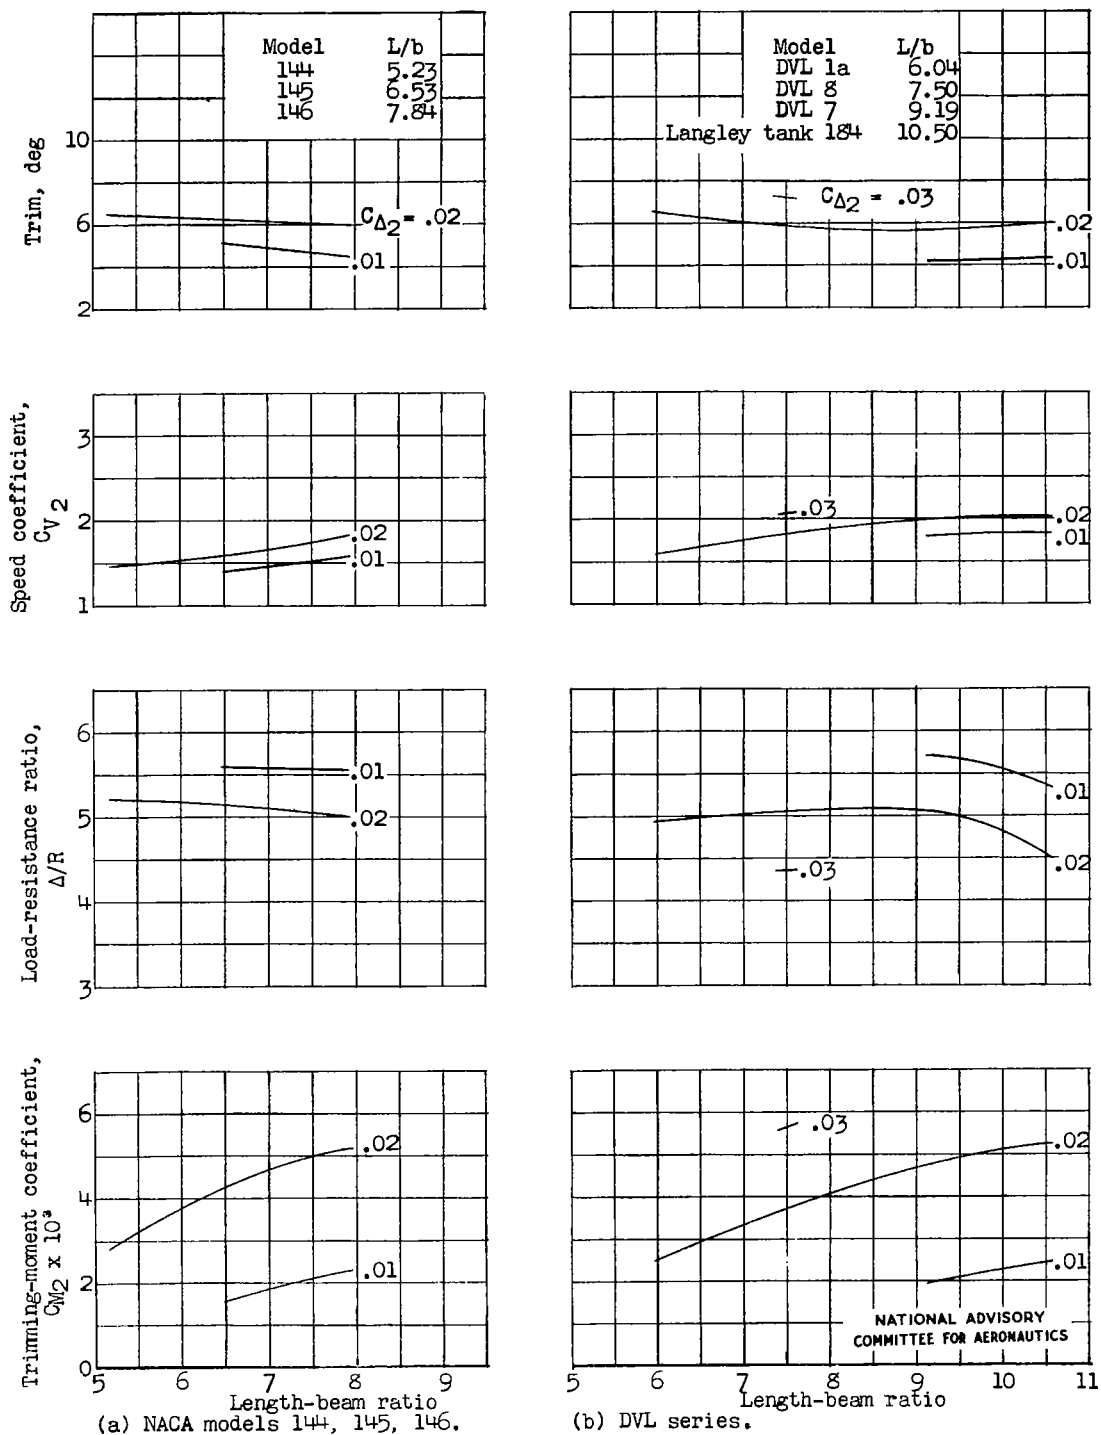
Figure 8.-   Best-trim hump characteristics for two series of models about
    their respective center-of-gravity positions. Constant length^2-beam product.

Model	L/b
DVL 1a	6.04
DVL 8	7.50
DVL 7	9.19
Langley tank 184	10.50

$C_\Delta = 2.0$

(a) DVL series.

$C_\Delta = .5$

Trim, deg

Model	L/b
144	5.23
145	6.53
146	7.84

(b) NACA models 144, 145, 146.

Load-resistance ratio, Δ/R

Model	L/b
339-22	5.07
339-1	6.19
339-23	7.32
339-46	8.45

(c) Stevens Institute series.

Length-beam ratio

Length-beam ratio

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS
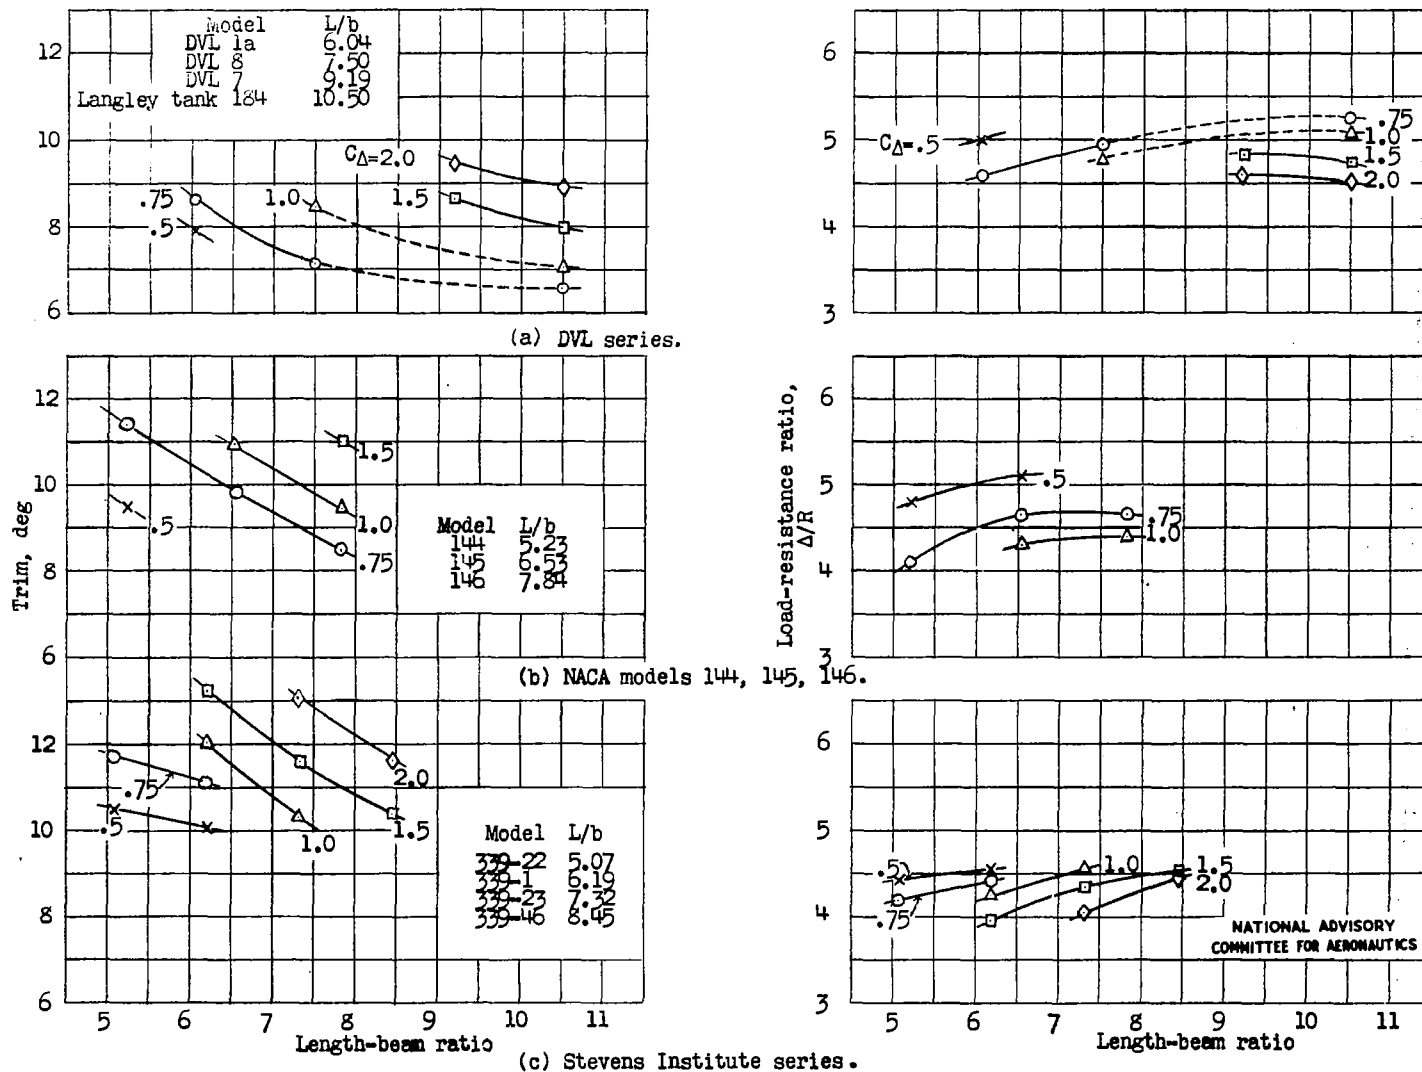
Figure 9 .- Free-to-trim characteristics at the hump for three different series of models about their respective center-of-gravity positions. Constant beam.
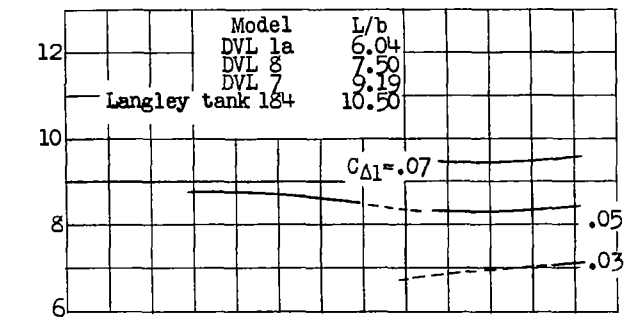
(a) DVL series.
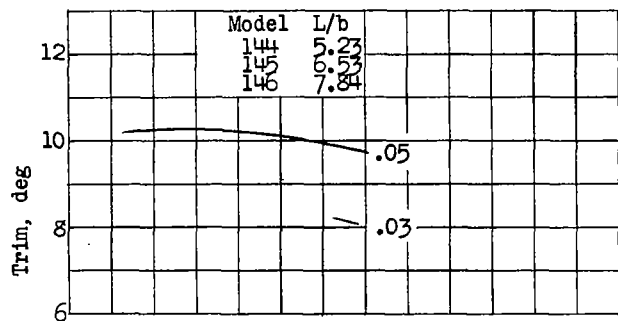
(b) NACA models 144, 145, 146.
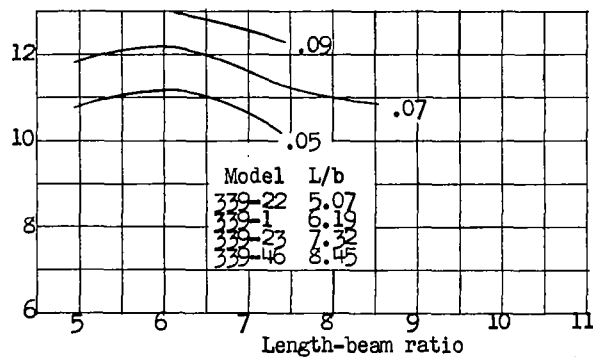
(c) Stevens Institute series.
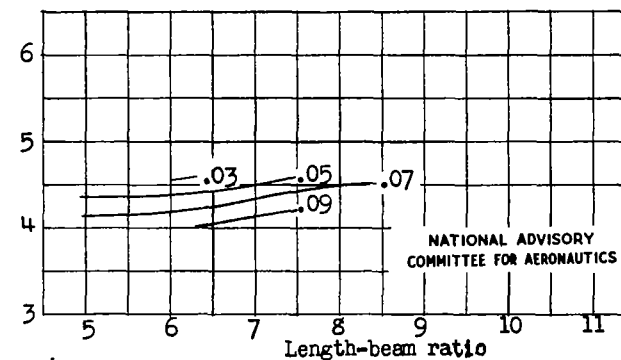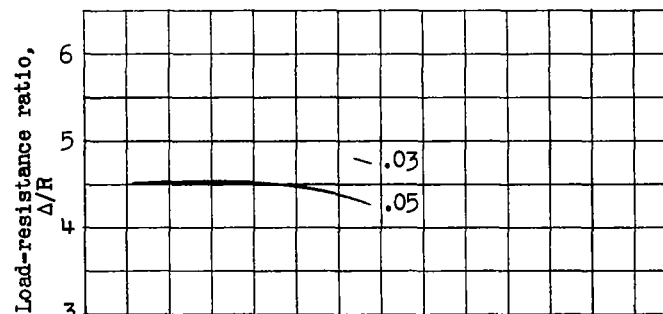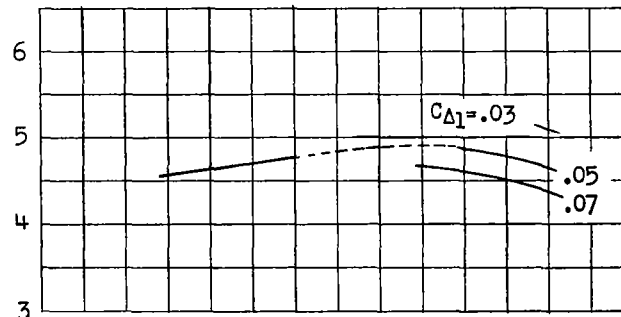
Figure 10 .- Free-to-trim characteristics at the hump for three different series of models about their respective center-of-gravity positions. Constant length-beam product.
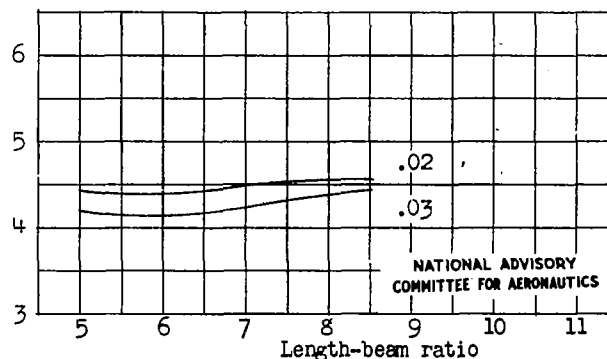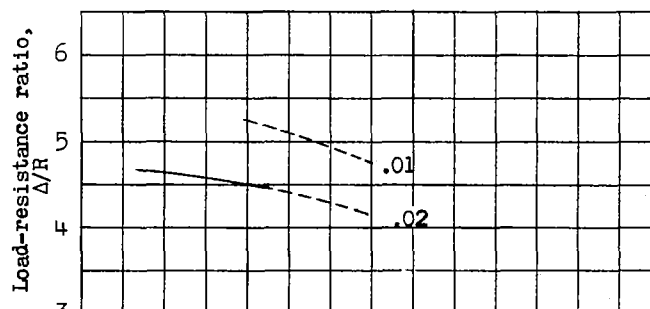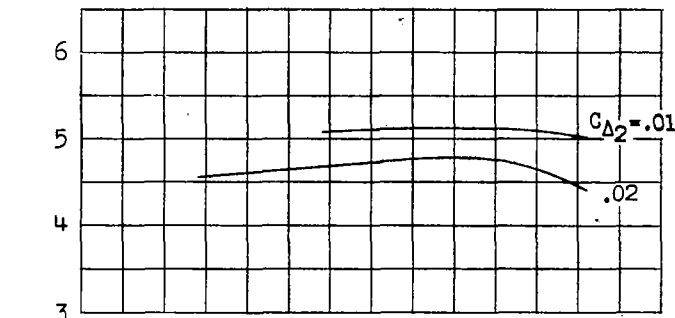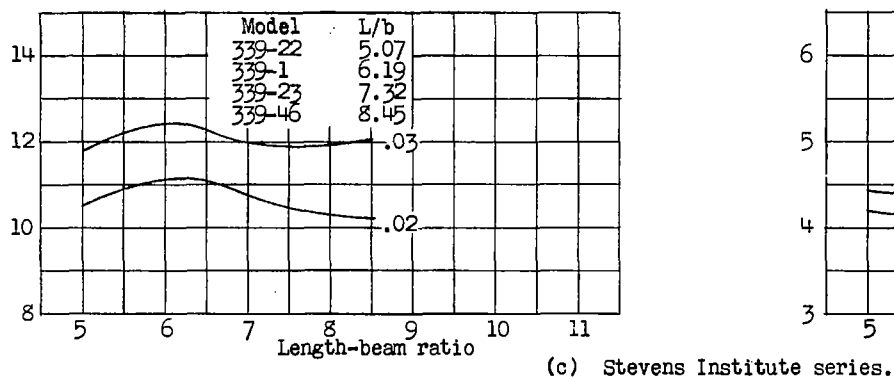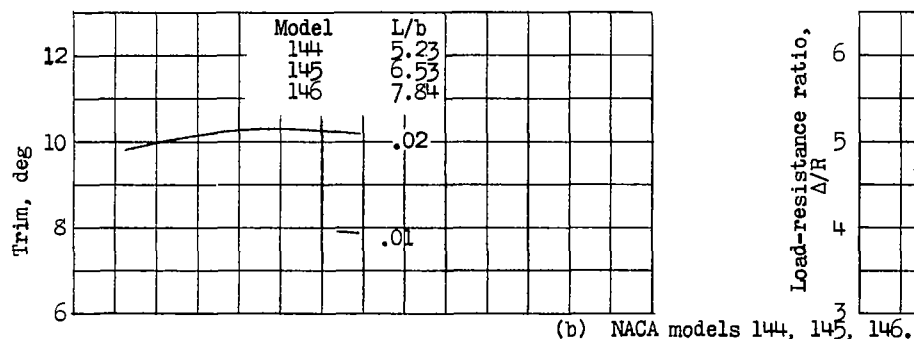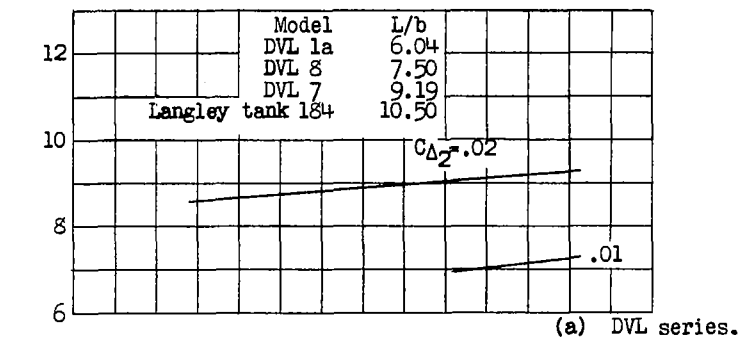
NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Model	L/b
DVL 1a	6.04
DVL 8	7.50
DVL 7	9.19
Langley tank 184	10.50

(a) DVL series.

Model	L/b
144	5.23
145	6.53
146	7.84

(b) NACA models 144, 145, 146.

Model	L/b
339-22	5.07
339-1	6.19
339-23	7.32
339-46	8.45

(c) Stevens Institute series.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Figure 11 .- Free-to-trim characteristics at the hump for three different series of models about their respective center-of-gravity positions. Constant length²-beam product.
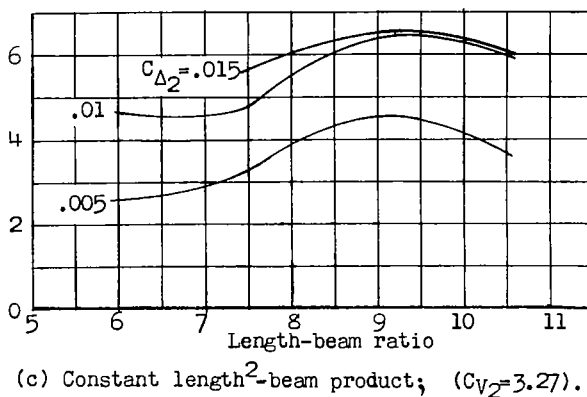
(a) Constant beam; (C_V=6.0).

(b) Constant length-beam product; (C_{V_1}=3.84).

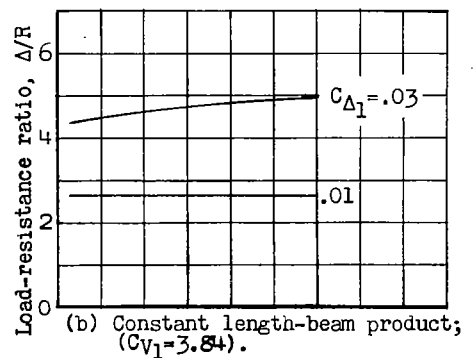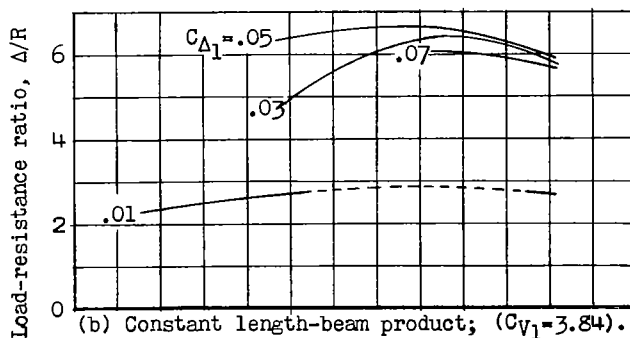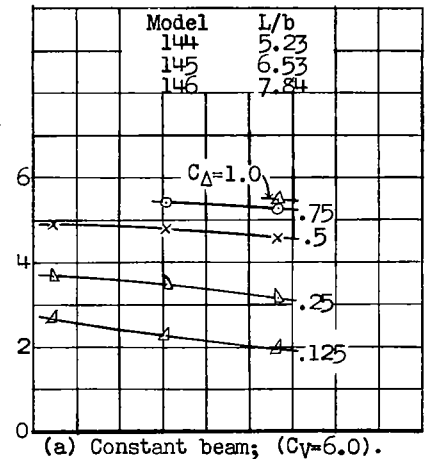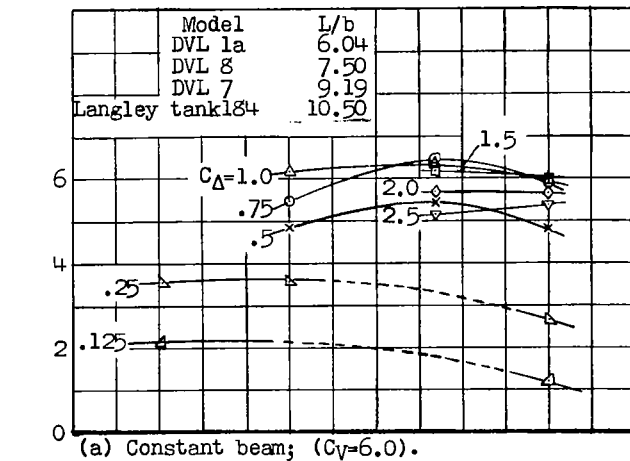(c) Constant length²-beam product; (C_{V_2}=3.27).
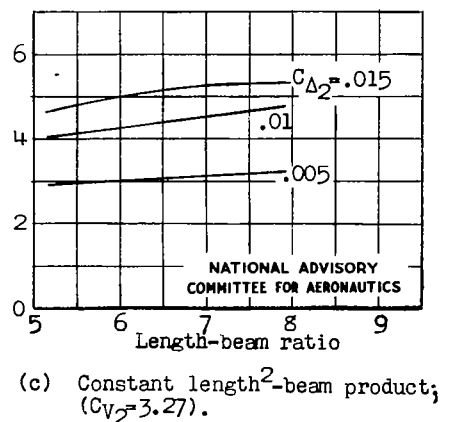
Figure 12.- High-speed characteristics of models of DVL series about their respective center-of-gravity positions. C_V=6.0 at length-beam ratio of 6.04; angle between forebody keel and horizontal, 7°.

(a) Constant beam; (C_V=6.0).

(b) Constant length-beam product; (C_{V_1}=3.84).

(c) Constant length²-beam product; (C_{V_2}=3.27).

Figure 13.- High-speed characteristics of models of NACA series about their respective center-of-gravity positions. C_V=6.0 at length-beam ratio of 6.04; angle between forebody keel and horizontal, 7°.